


CUBE SWL-32

700LM

Single Beam Up & Down Lighting

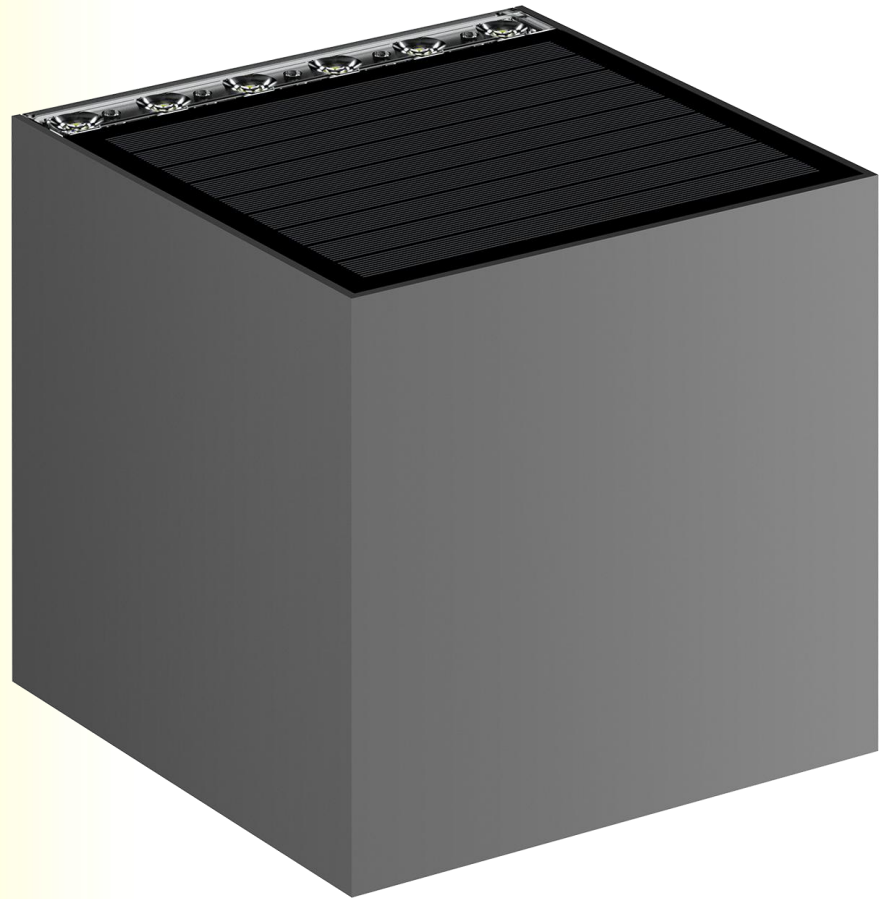

Solar



ALS



Safety




Ray Sensor



Charging
temperature



Working
temperature



Professional light distribution, angle up to 22°

Commendable Light Cutting Effect.
The Beam Shape Controlled by Yourself.




Silicone button


Four lighting mode selections, smooth transition of light without a steep drop



Item: SWL-32	
Light Brightness	700lm.Max (up 200lm, down 500lm)
Solar panel	
Power	Monocrystalline silicon, 4.86V/ 1.5W
Li-ion battery	
Capacity	3.7V 7.4WH
Charging / Discharging Temp	0~45°C / -20~60°C
Charging Time	7H
LED	2835, 16pcs
CCT	4000K, Ra>70
Efficiency	160lm/W
Types of Lighting	Up@Symmetrical 22°, Down@cut-off type
Performance	
Lighting Time in Rainy day	>10 days
Lighting Mode	M1: 25% till dawn M2: 50% till dawn M3: 75% till dawn M4: 100% till dawn
Switch	1. ON and OFF: long press for 1.5S 2. Short press to switch the lighting mode
Core Technology	ALS2.3
IP	IP54
Lighting Area	3m²
Install Height	2.5m
Material	ABS + PC + PS
Net Weight	470g

unit: mm

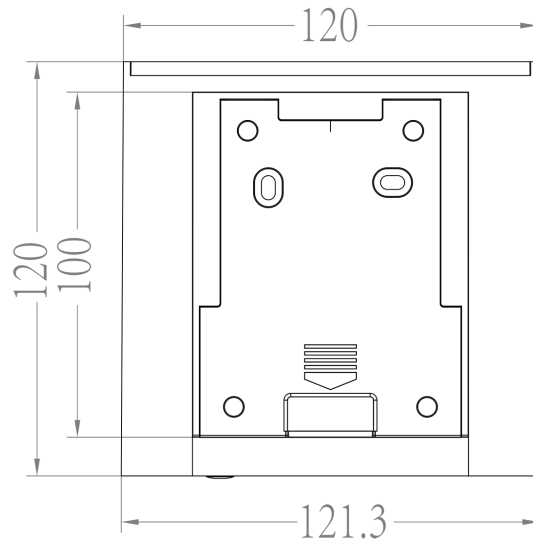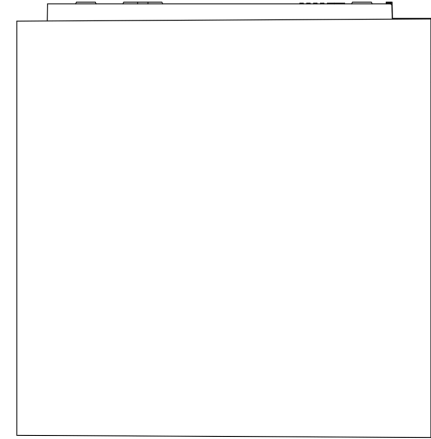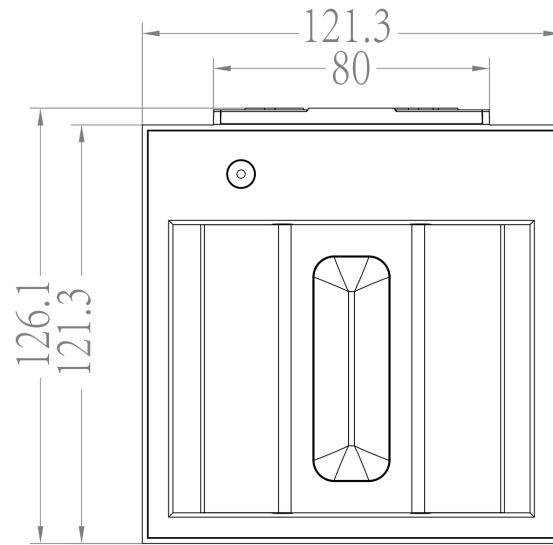

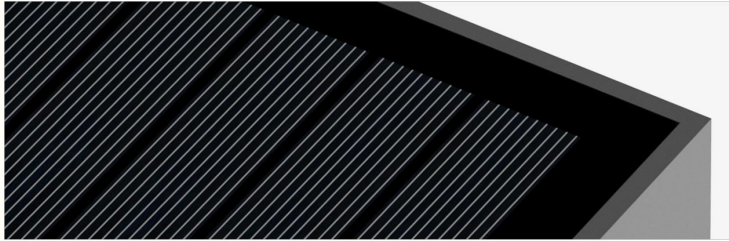


Monocrystalline silicon solar panel



Up@Symmetrical 22°



Down@cut-off type

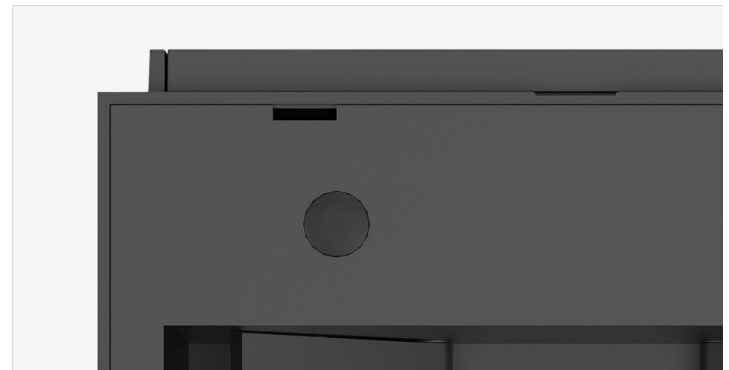


Silicone button




A Great Company should always pay the highest attention to every detail of design, and the craftsmanship spirit should be filled in the whole design process and mass production.

Punch holes in the wall and install plastic columns
Fix the lamp with screws


1

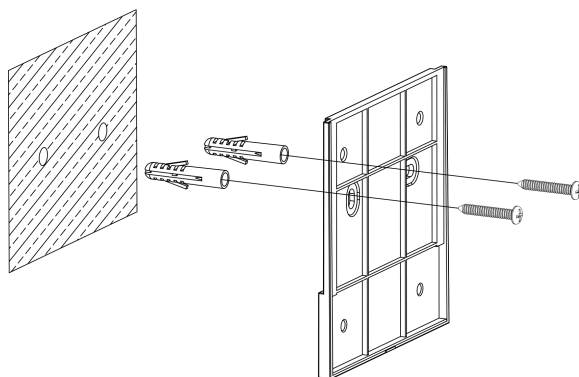

2

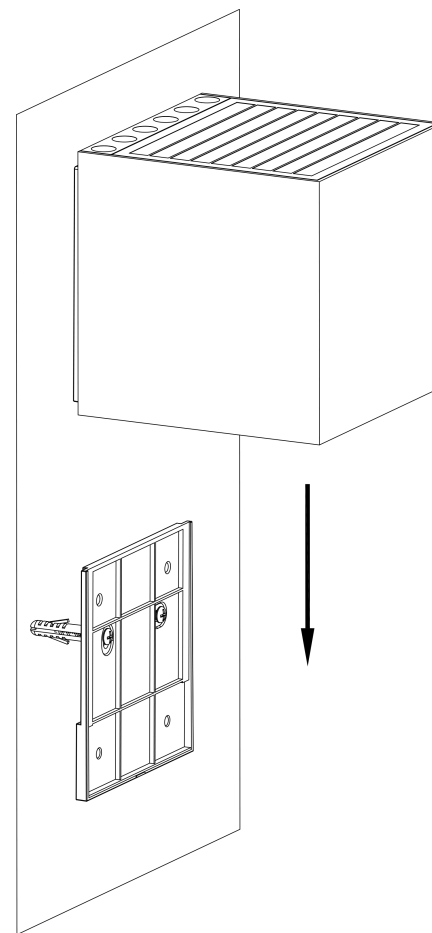

SOLAR UP & DOWN WALL LIGHT

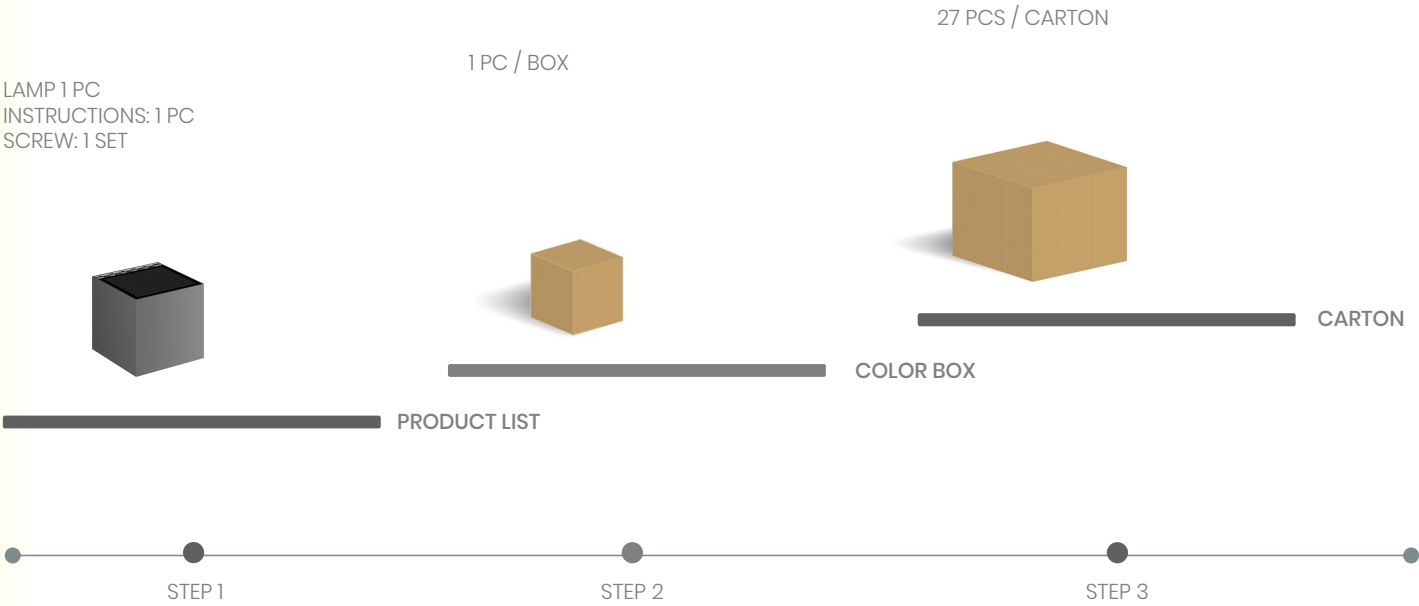

MODEL NO.	PACKING METHOD	PCS/CTN	QTY(PCS)	CTN QTY	CARTON SIZE(MM)	N.W.(KG)	G.W.(KG)
SWL-32	INNER BOX	1	1	1	126*126*133	0.48	0.55
	CARTON	27	27	1	398*398*419	13	16

Net weight and gross weight are for reference only



S O L A R / U P & D O W N / L I G H T



44

INNOVATING THE FUTURE OF SOLAR LIGHTING