

CUBE SWL-25

1000LM

Type 4 Light Distribution



Solar



ALS



Safety



Ray Sensor



Charging
temperature



Working
temperature

SOLAR WALL LIGHT

NORTH AMERICAN STANDARD TYPE 4 LIGHT DISTRIBUTION

Wider lighting area, light output
efficiency up to 90%+





Anti-glare light

The light is more uniform and soft

The optimal wall sticking angle does not affect solar charging at all

The unique product in the market that is suitable for both high and low installations



SILICONE BUTTON

Four lighting mode selections,
smooth transition of light without
a steep drop



4 lighting modes to choose,
all mode you need are available

M1

25% till dawn




M2

10%
+
PIR (30S) till dawn



M3

0%
+
PIR (30S) till dawn

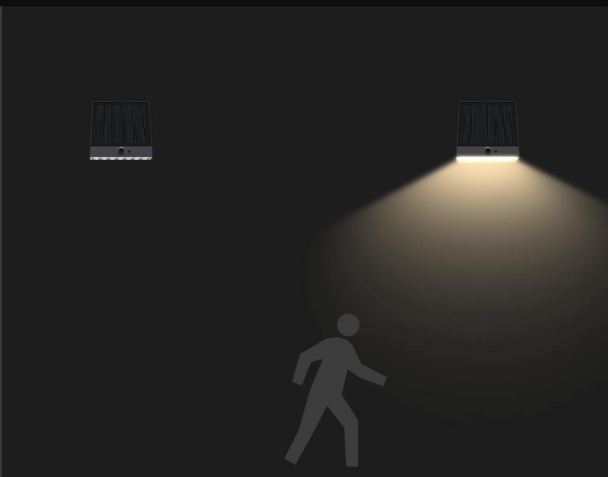


M4

100% till dawn




Item: SWL-25	
Light Brightness	1000 Lumens
Solar panel	
Power	Monocrystalline silicon, 4.86V/ 2W
Li-ion battery	
Capacity	3.7V 7.4WH
Charging / Discharging Temp	0~45°C / -20~60°C
Charging Time	5H
LED	2835, 21pcs
CCT	4000K, Ra>70
Efficiency	160lm/W
Types of Lighting	Type 4
Performance	
Lighting Time in Rainy day	>10 days
Lighting Mode	M1: 25% till dawn M2: 10% + PIR (30S) till dawn M3: 0% + PIR (30S) till dawn M4: 100% till dawn
Indicator light	Charging indicator: The red indicator light flashing
	Working indicator: The red indicator light is always on when turn on the light and discharging
	Mode switching: M1: Flash 1 time; M2: flash 2 times; M3: flash 3 times; M4: flash 4 times
Switch	1. on and off: long press for 1.5S 2. Short press to switch the lighting mode
Core Technology	ALS2.3
IP	IP54
PIR	120°, 5m.Max
Install Height	2.5~3m
Material	ABS + PC

SOLAR WALL LIGHT

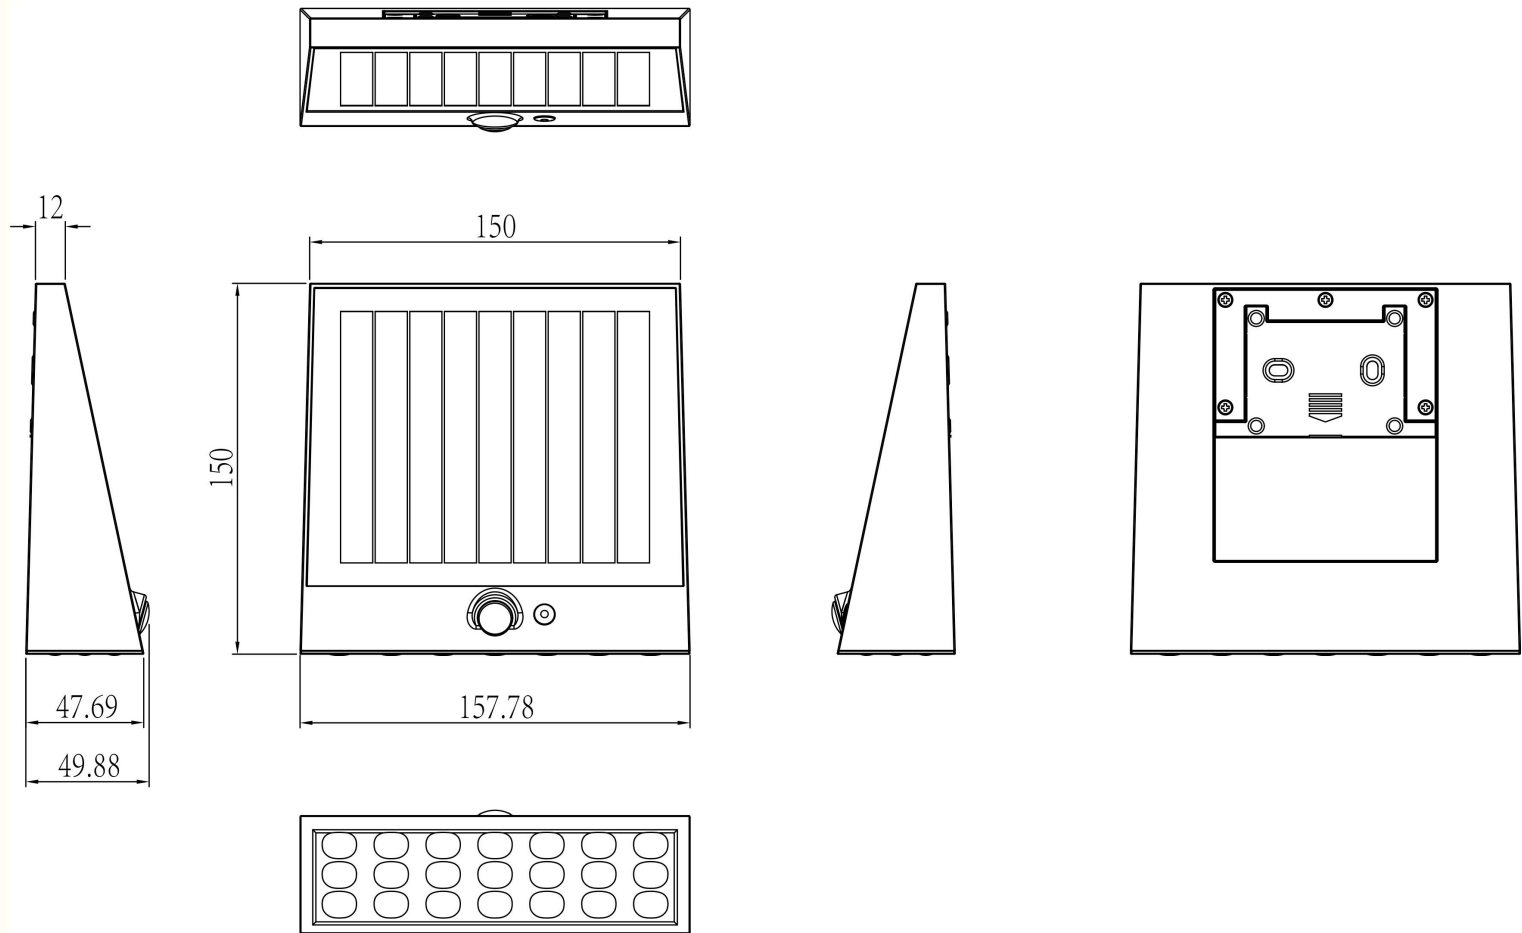

unit: mm


SOLAR WALL LIGHT

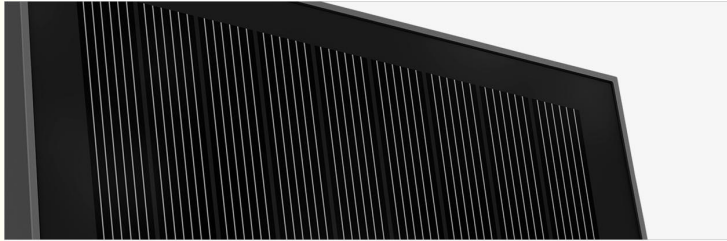

Monocrystalline silicon solar panel







PIR: 120°, 5m.Max

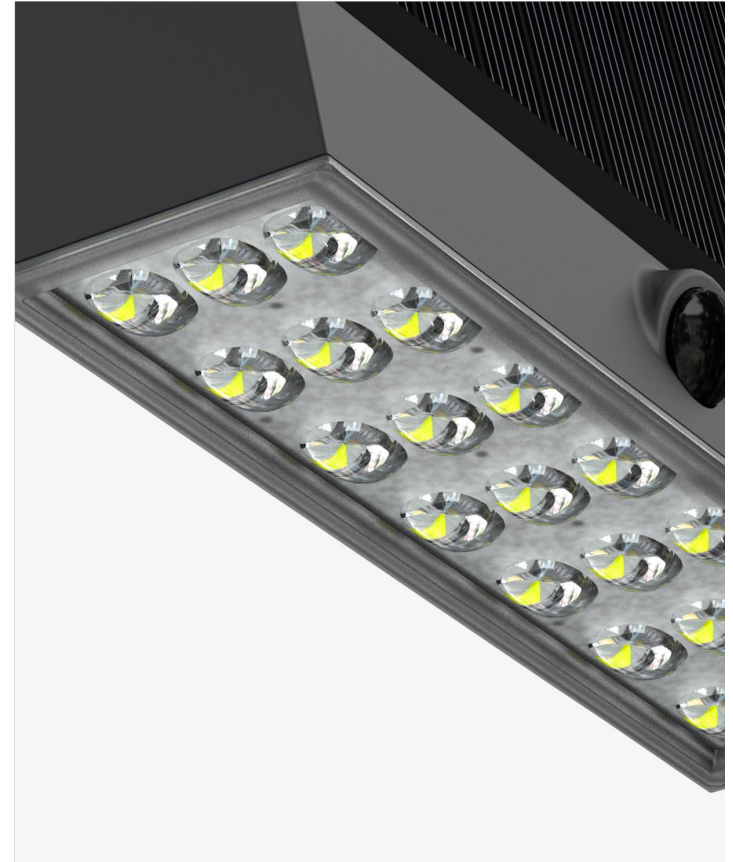


High lumen LEDs 160lm/W



A Great Company should always pay the highest attention to every detail of design, and the craftsmanship spirit should be filled in the whole design process and mass production.

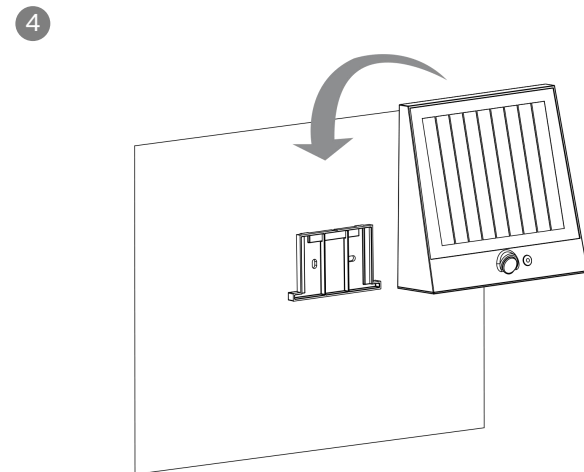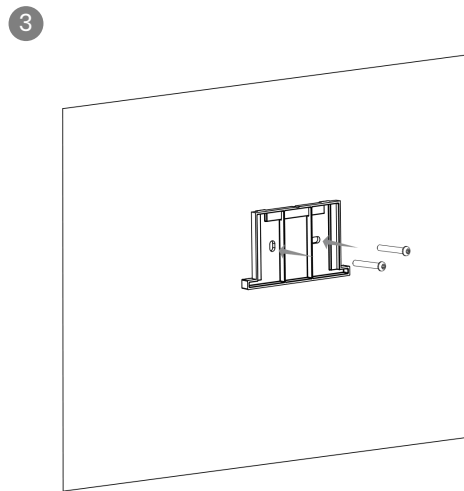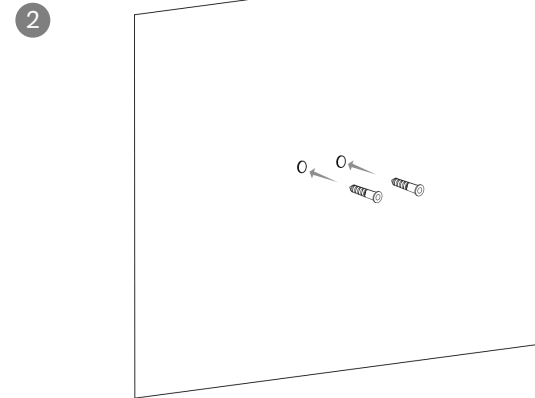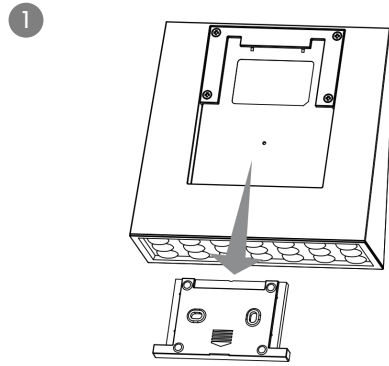

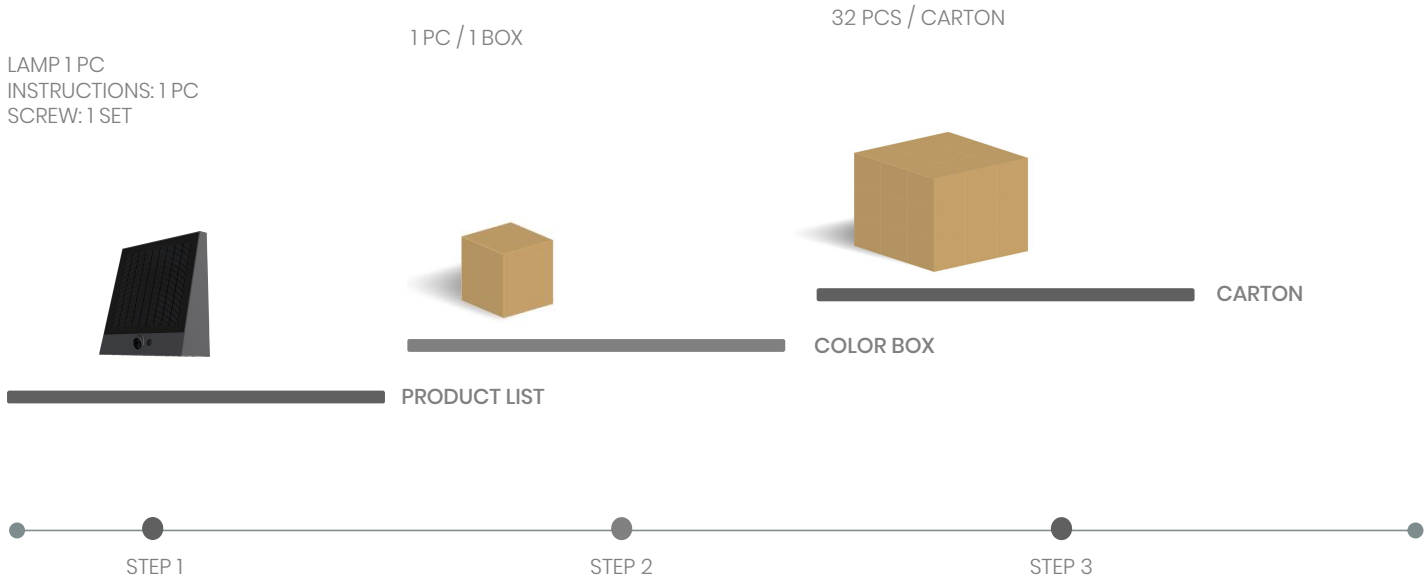

MODEL NO.	PACKING METHOD	PCS/CTN	QTY(PCS)	CTN QTY	CARTON SIZE(MM)	N.W.(KG)	G.W.(KG)
SWL-25	INNER BOX	1	1	1	163*55*157	0.4	0.47
	CARTON	32	32	1	460*345*335	12.65	16.15

Net weight and gross weight are for reference only

SOLAR WALL LIGHT





S O L A R / W A L L / L I G H T



INNOVATING THE FUTURE OF SOLAR