


CUBE SWL-33

1400LM

**Twin Beams
Up & Down
Lighting**

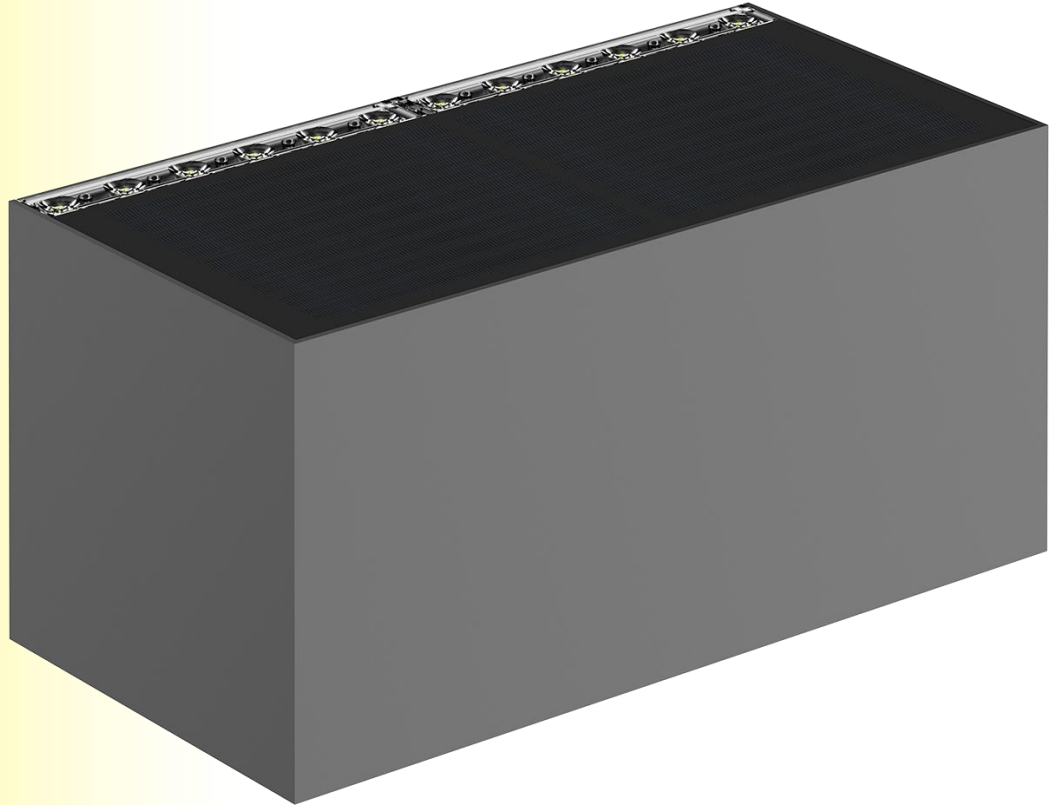

Solar



ALS



Safety



Ray Sensor



Charging
temperature




Working
temperature

**Professional light distribution,
angle up to 22°**

Commendable Light Cutting Effect.
The Beam Shape Controlled by Yourself.

Silicone button


Four lighting mode selections, smooth transition of light without a steep drop

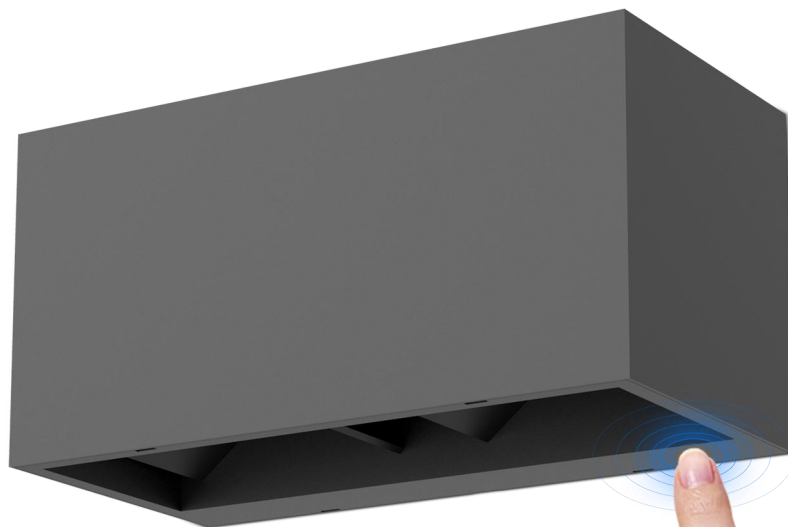


Item: SWL-33	
Light Brightness	1400lm.Max (up 400lm, down 1000lm)
Solar panel	
Power	Monocrystalline silicon, 4.86V/ 3W
Li-ion battery	
Capacity	3.7V 14.8WH
Charging / Discharging Temp	0~45°C / -20~60°C
Charging Time	7H
LED	2835, 32pcs
CCT	4000K, Ra>70
Efficiency	160lm/W
Types of Lighting	Up@Symmetrical 22°, Down@cut-off type
Performance	
Lighting Time in Rainy day	>10 days
Lighting Mode	M1: 25% till dawn M2: 50% till dawn M3: 75% till dawn M4: 100% till dawn
Switch	1. ON and OFF: long press for 1.5S 2. Short press to switch the lighting mode
Core Technology	ALS2.3
IP	IP54
Lighting Area	3m²
Install Height	2.5m
Material	ABS + PC + PS
Net Weight	765g

unit: mm

SOLAR UP & DOWN WALL LIGHT

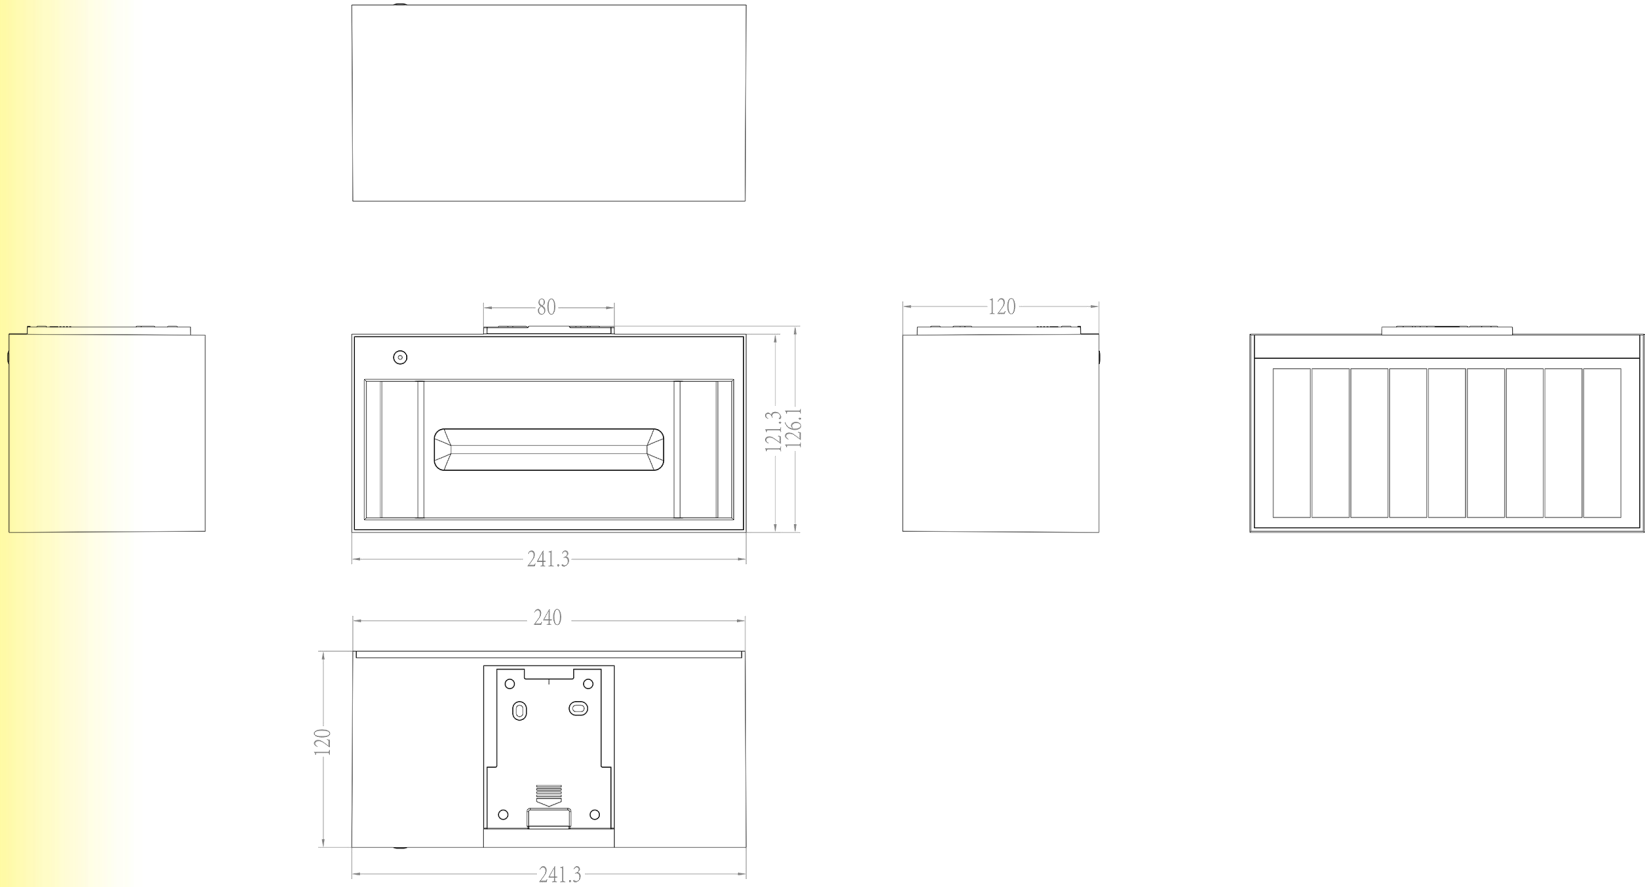

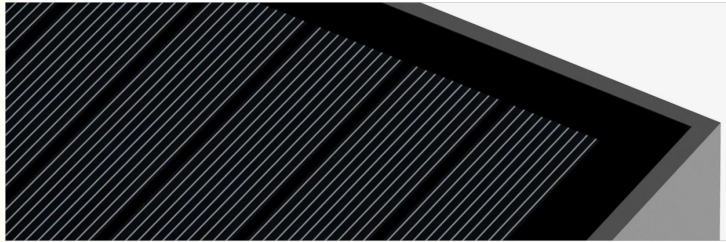


Monocrystalline silicon solar panel



Down@cut-off type



Up@Symmetrical 22°

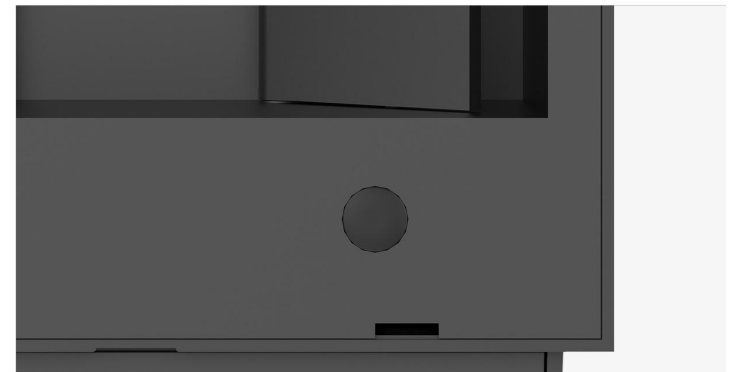


Silicone button




A Great Company should always pay the highest attention to every detail of design, and the craftsmanship spirit should be filled in the whole design process and mass production.


Punch holes in the wall and install plastic columns
Fix the lamp with screws

1

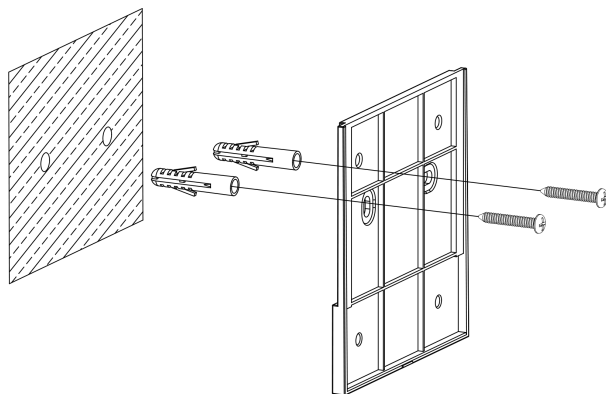

2

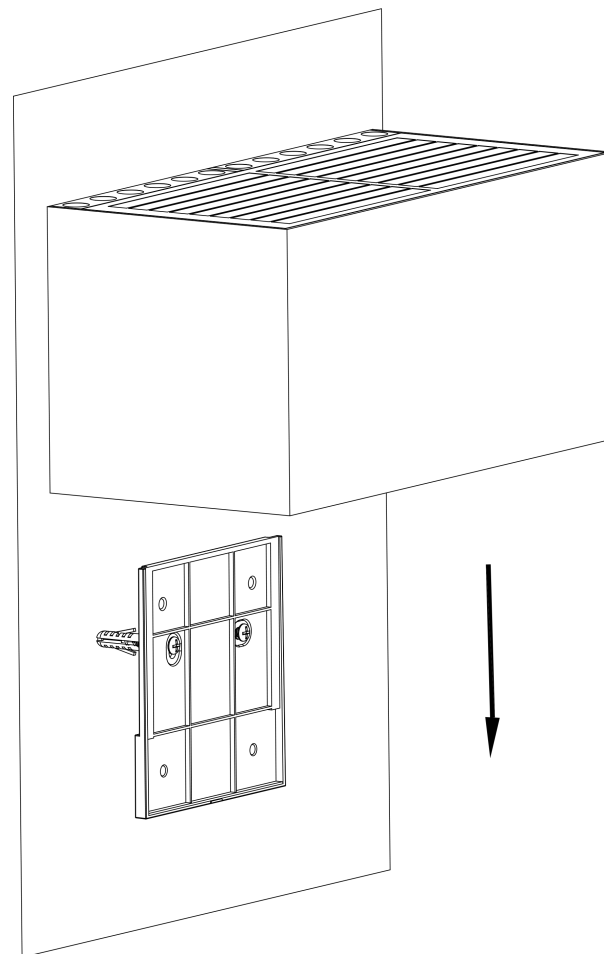

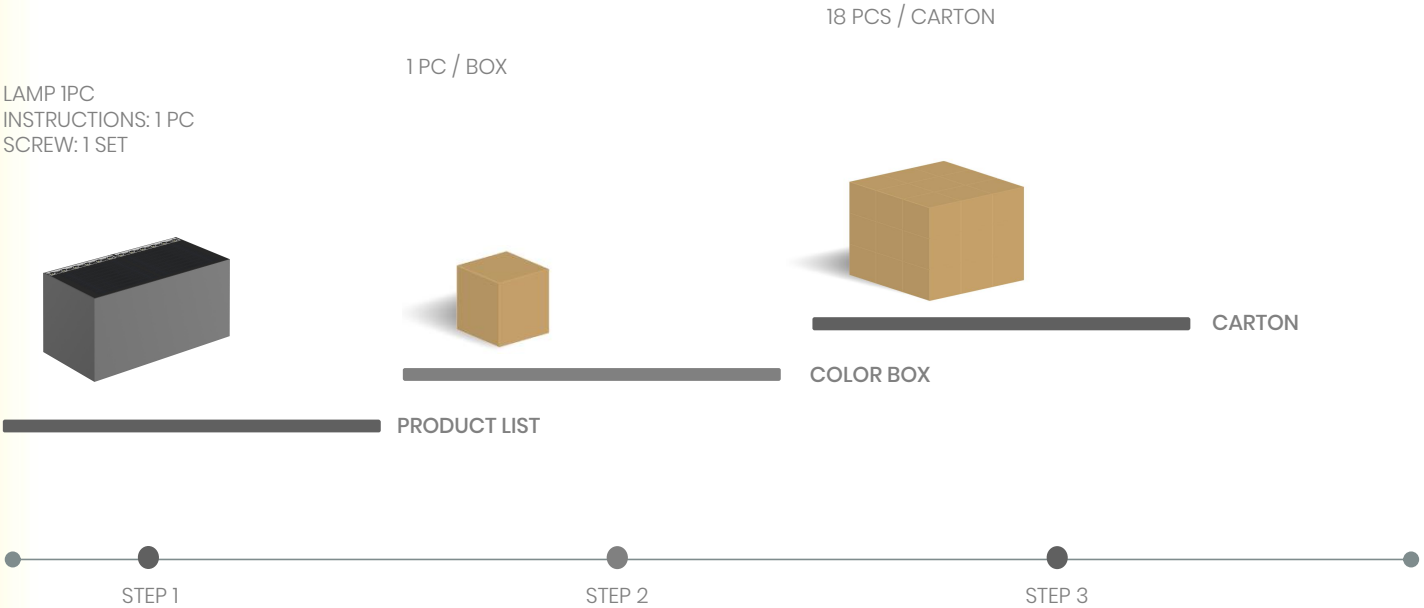

MODEL NO.	PACKING METHOD	PCS/CTN	QTY(PCS)	CTN QTY	CARTON SIZE(MM)	N.W.(KG)	G.W.(KG)
SWL-33	INNER BOX	1	1	1	246*126*133	0.81	0.95
	CARTON	18	18	1	512*398*419	14.5	18

Net weight and gross weight are for reference only



S O L A R / U P & D O W N / L I G H T

INNOVATING THE FUTURE OF SOLAR LIGHTING

www.sresky.com