




SRESKY
SINCE 2004

ARGES M

SOLAR STREET LIGHT



SSL-06M-V1.0

INTRODUCTION

Product specifications

01 FRONT COVER

02 CATALOG

03 MAIN
ADVANTAGES

04 MAIN
ADVANTAGES

05 SPECIFICATIONS

06 OPTICAL FIGURE

07 DIMENTION
FIGURE

08 LIGHT POLE
DIAGRAM

09 MORE DETAILS

10 CORE
TECHNOLOGY

11 INSTALLATION
INSTRUCTIONS

12 PACKAGE DETAIL

13 APPLICATION

| SOLAR STREET LIGHT



BRIGHTER & MORE DURABLE

Scientific Light Distribution

Multiple installation way

Meet different application need

Install on the wall / Install on the pole



Product Advantages

ALS Technology Guarantees 10 Continuous Working Nights
TCS Technology Ensures Longer Battery Lifespan



POWER TYPE LITHIUM BATTERY

High temperature
resistant Li-ion
battery and Tcs
technology

Capacity Indicator:

- 10%—30%
- 30%—70%
- 70%+



Item: SSL-06M

Light Brightness	3000 lumens
------------------	-------------

Solar panel

Power	Monocrystalline, 20W
-------	----------------------

Li-ion battery

Capacity	14.8V, 153.92WH 2.6AH/PC
----------	--------------------------

Charging/Discharging Temp	0~45°C / -20~60°C
---------------------------	-------------------

Charging Time	8.8H
---------------	------

LED (OSRAM)	3030 40pcs
-------------	------------

Color Temp	5700K, Ra 70+
------------	---------------

Efficiency	190lm/W
------------	---------

UV LED	-
--------	---

Performance

Lighting Time in Rainyday	>10 days
---------------------------	----------

Control Mode	Button Switch, ON/OFF Long Press 1.5s
--------------	---------------------------------------

Lighting Mode	M1: 600LM+PIR (3000LM) / M2: 2000LM 5H+500LM (PIR 3000LM) 5H+1400LM / M3: 1400LM
---------------	--

Mode Indication	M1: RED / M2: GREEN / M3: ORANGE
-----------------	----------------------------------

Capacity Indication	Green Light: ≥70% Orange Light: 30%~70% Red Light: <30%
---------------------	---

PIR	120° 8m
-----	---------

Core technology	ALS2.2
-----------------	--------


Self-Cleaning Function	-
------------------------	---

IP/IK Class	IP65 / IK08
-------------	-------------


Installation Height	5M
---------------------	----

SSL-06M



Road Simulated Diagram

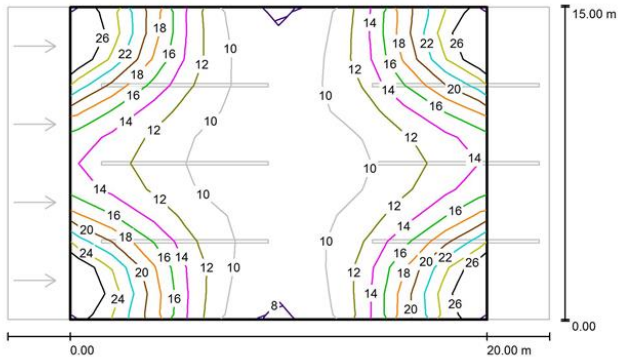


Illumination Curve

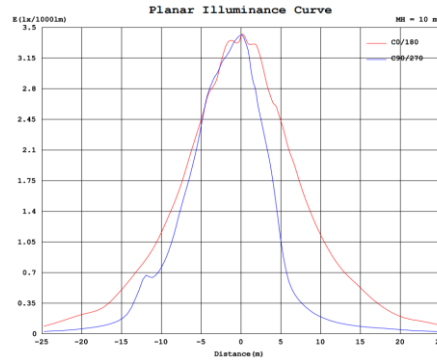

Luminance Distribution

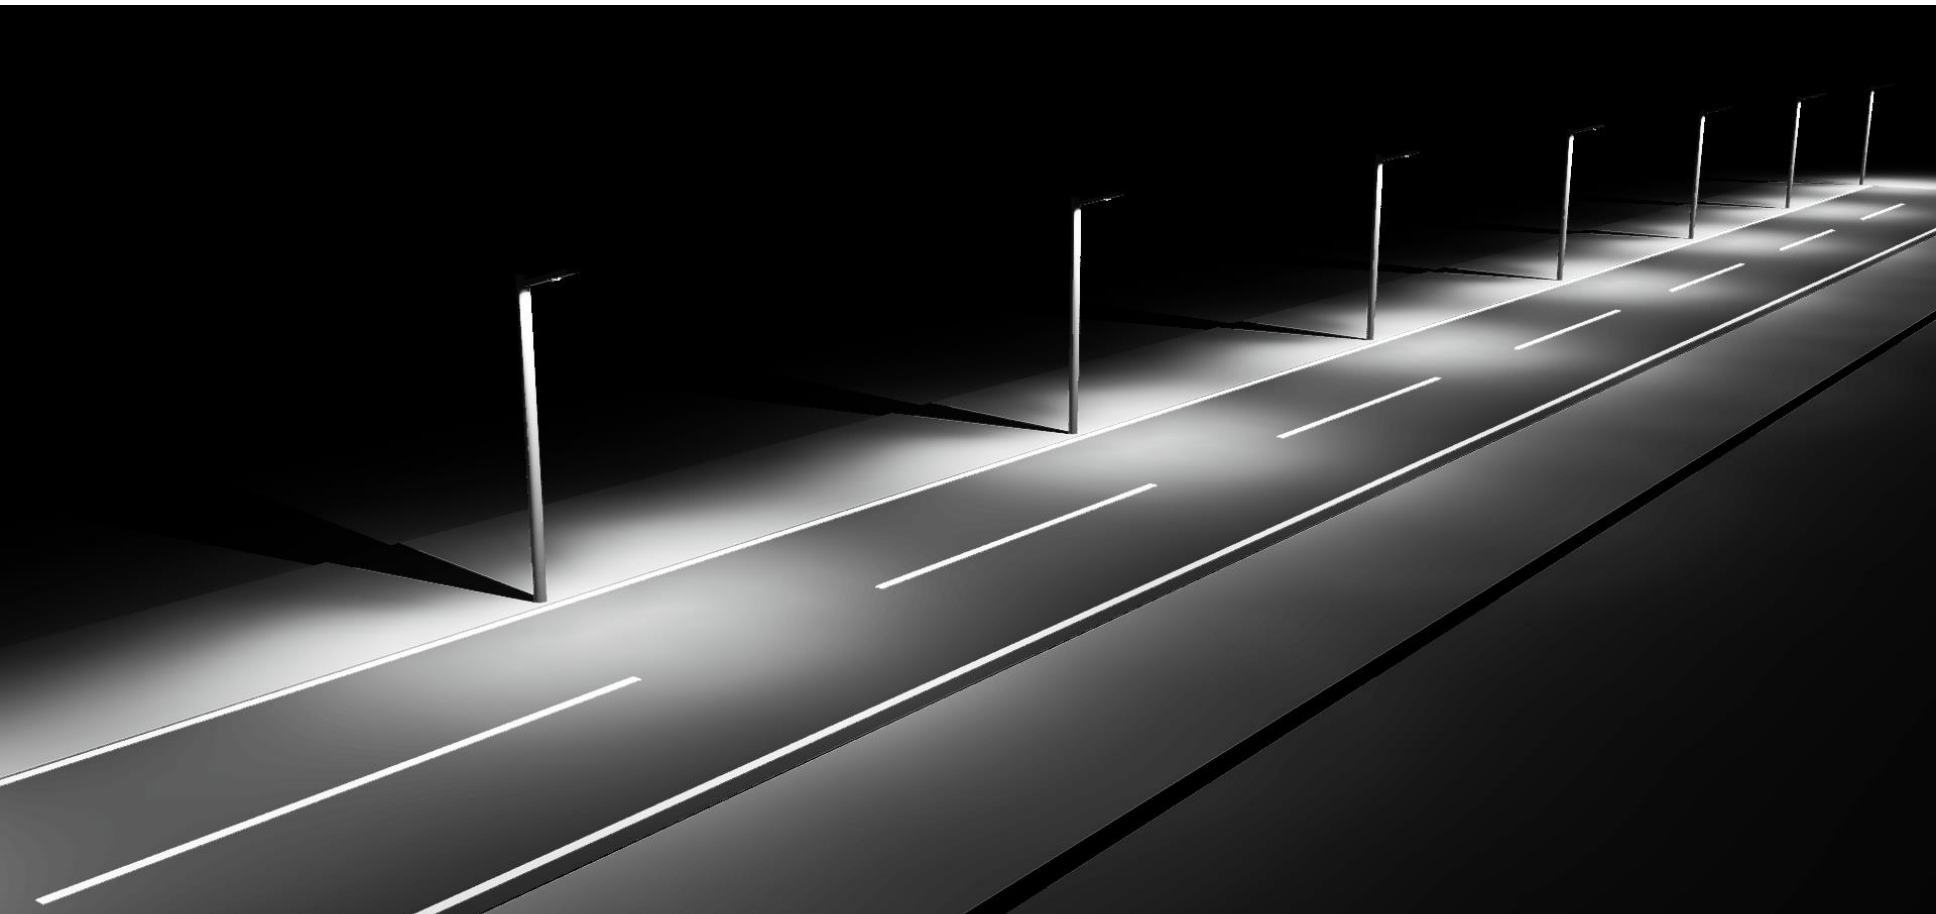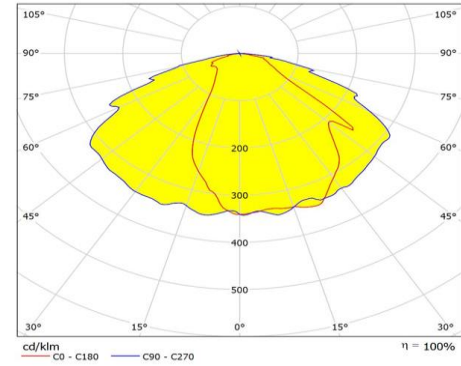


SOLAR LIGHT I DIMENTION FIGURE

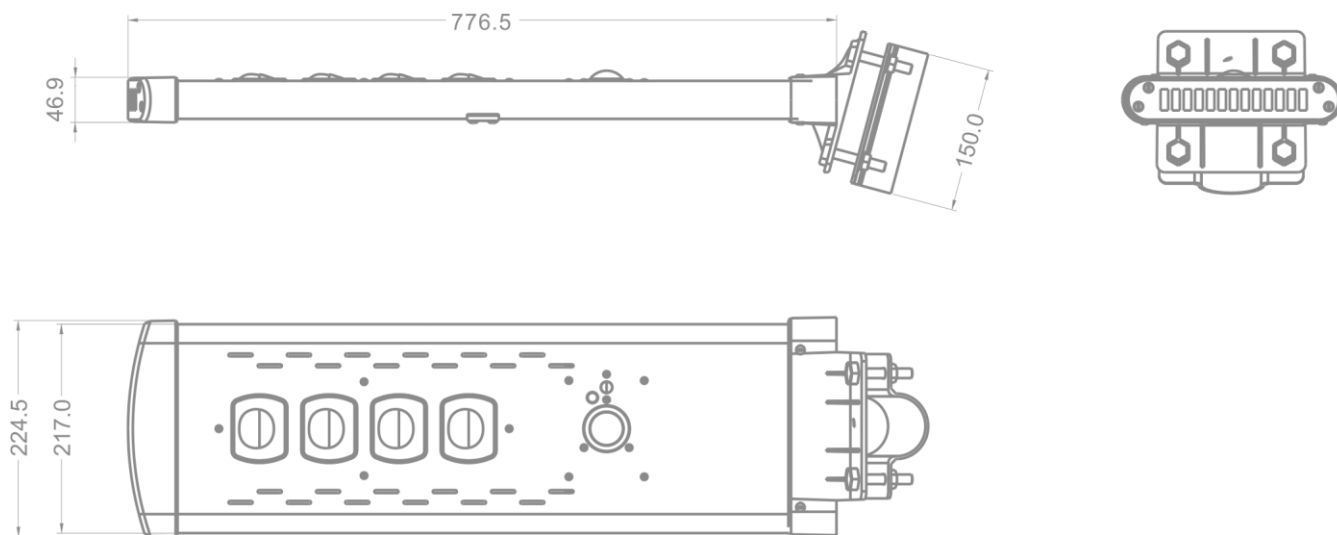



MAX 3.5M

Detail Benefits



High lumen LEDs 190lm/W



Monocrystalline >21%




Capacity indication / Switch /
High Sensitivity PIR Sensor



Bracket can fix the lamp on the pole/wall




A Great Company should always pay the highest attention to the every detail design , and the craftsmanship spirit should be filled in the whole design process and mass production.

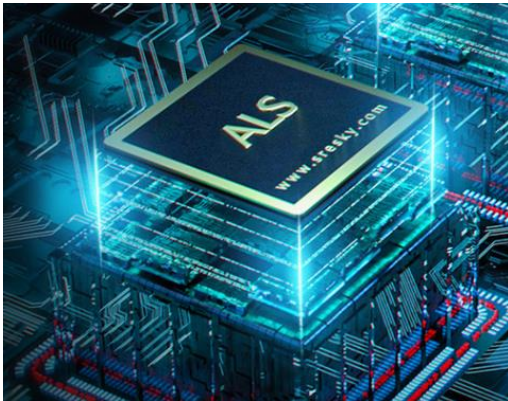


ADVANTAGE OF ALS




ADVANTAGE OF TCS

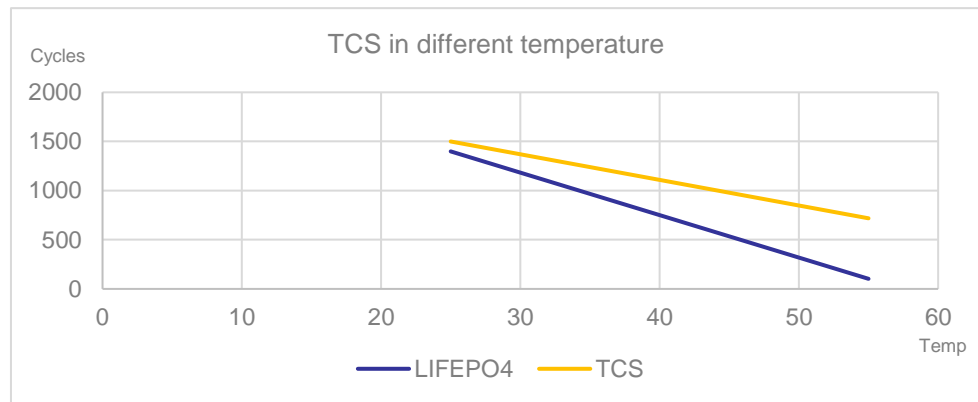


- 1 Dig a hole according to the size of the foundation cage, put the foundation cage into the hole and fix it with concrete C20.

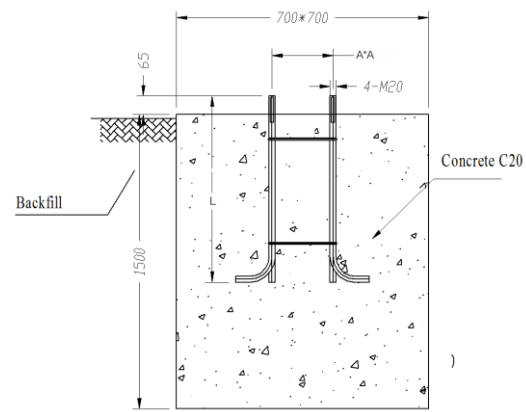


- 2 Use the supplied screws to fix the Hoop on the lamp

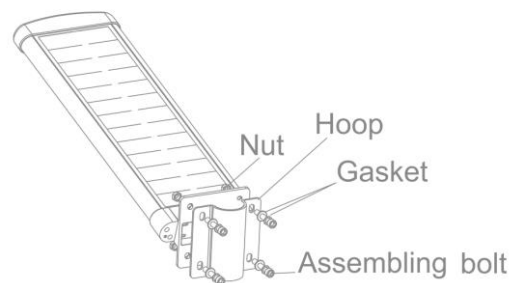


- 3 Use the supplied screws to fix the lamp on the pole .



- 4 Lift the lamp pole by the person or machine, align the bottom flange of the lamp pole with the foundation cage, and then fix the lamp pole with screws.

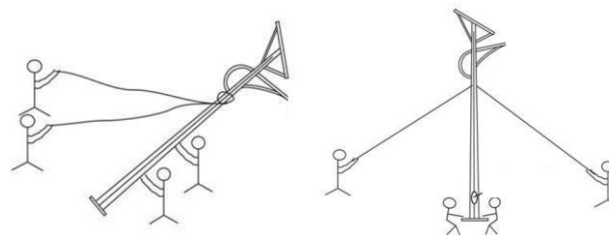

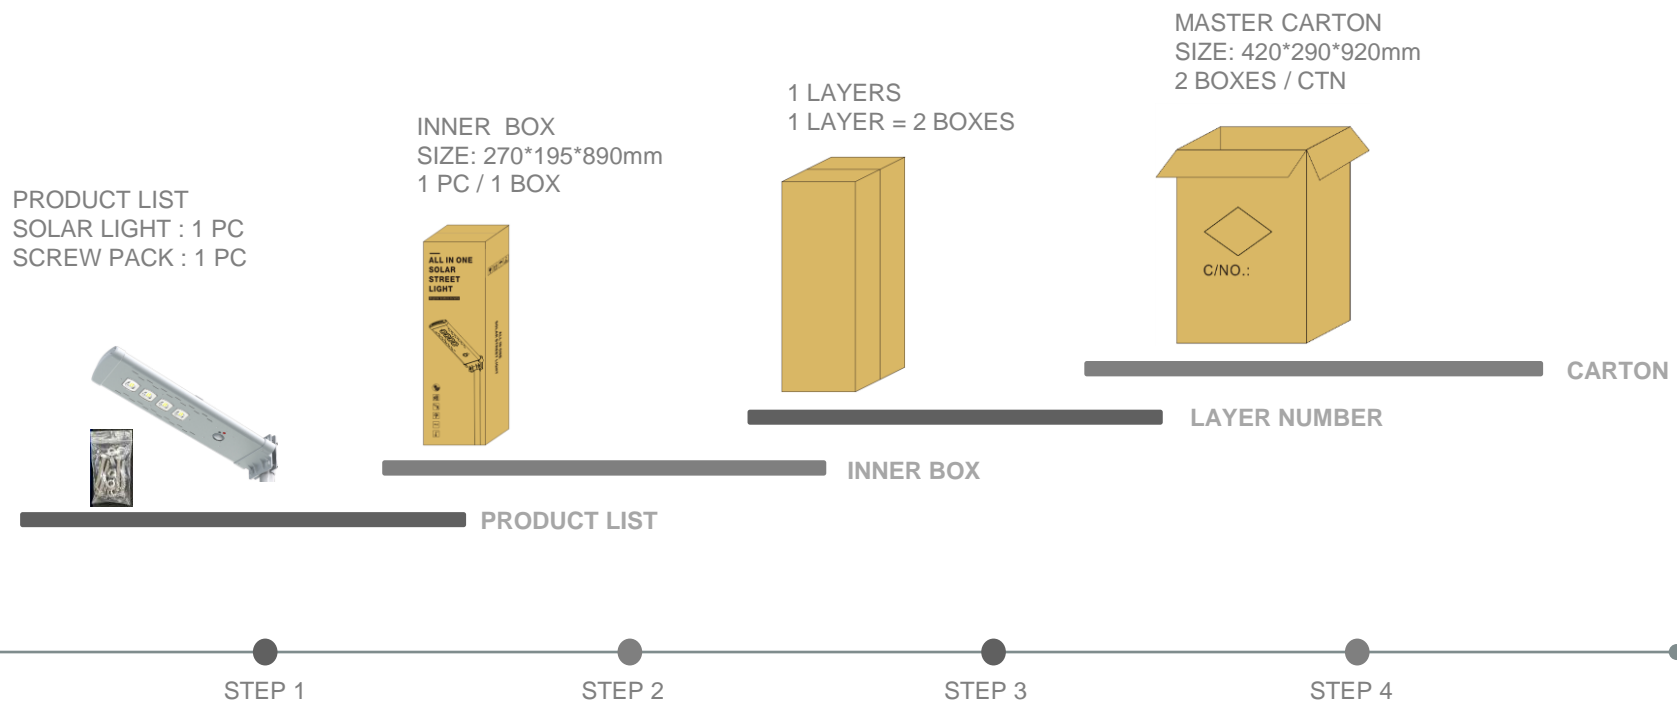

MODEL NO.	PACKING METHOD	PCS/CTN	QTY(PCS)	CTN QTY	CARTON SIZE(MM)	N.W.(KG)	G.W.(KG)
SSL-06M	INNER BOX	1	1	1	270*195*890	5.5	6.34
	CARTON	2	2	1	420*290*920	11.2	13.9

Net weight and gross weight are for reference only

S / O / L / A / R / L / I / G / H / T

THANKS
VERY
MUCH